



# T21

## Product Manual

Jan. 2025

**BITMAIN**

BITMAIN TECHNOLOGIES INC.

# 1. Specification

Product Glance	Value	
Model	T21	
Version	10	
Crypto algorithm/coins	SHA256   BTC/BCH/BSV	
Working mode <sup>(1-1)</sup>	NEM	HEM
Typical hashrate, TH/s <sup>(1-2)</sup>	190	233
Power on wall @30°C <sup>(1-3)</sup> , Watt <sup>(1-2)</sup>	3610	5126
Power efficiency on wall @30°C, J/TH <sup>(1-2)</sup>	19.0	22.0

Detailed Characteristics	Value	
<b>Power supply</b>		
Phase	3	
Input voltage <sup>(2-1)</sup> , Volt	380~415	
Input frequency range, Hz	50~60	
Maximum input current, Amp	12	
<b>Hardware configuration</b>		
Network connection mode	RJ45 Ethernet 10/100M	
Server size (Length*Width*Height, w/o package), mm	400*212*290	
Server size (Length*Width*Height, with package), mm	570*316*430	
Net weight, kg	17.0	
Gross weight, kg	19.1	
Noise <sup>(2-2)</sup> @30°C, dBA	76	
<b>Environment requirements</b>		
Operation temperature, °C	0~45	
Storage temperature, °C	-20~70	
Operation humidity(no condensation), RH	10%~90%	
Operation altitude <sup>(2-3)</sup> , m	≤2000	

## Notes:

(1-1) NEM: Normal Energy Mode; HEM: High Energy Mode.

(1-2) The Hashrate value, Power on wall, and Power efficiency on wall are all typical values, The actual Hashrate value fluctuates by ± 3%, and the actual Power on wall and Power efficiency on wall fluctuate by ±5%.

(1-3) Inlet air temperature.


(2-1) Caution: Wrong input voltage may probably cause server damaged.

(2-2) The noise is loudest when the fan is under maximum RPM(rotation per minute).

(2-3) When the server is used at an altitude from 900m to 2000m, the highest operating temperature decreases by 1°C for every increase of 300m.

## 2. Performance Curve

### (1) Hashrate vs. Ambient Temperature

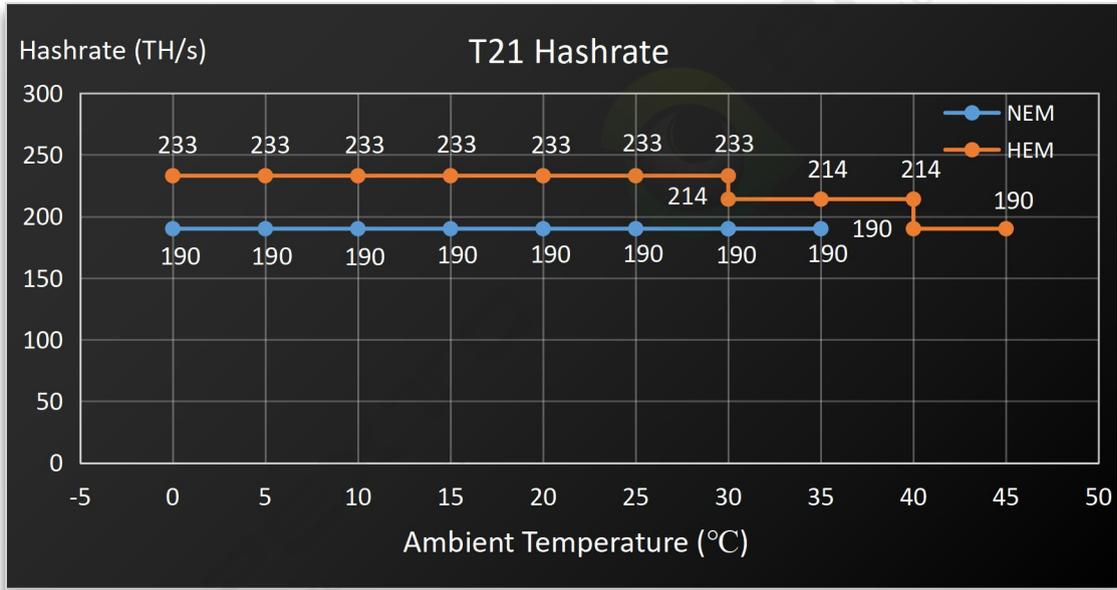

### (2) J/T vs. Ambient Temperature

